





41.10 ±2.00
[1.618 ±0.079]

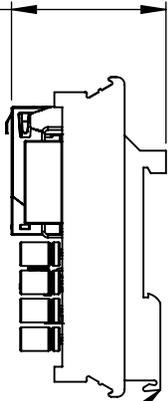

114 ±2
[4.504 ±0.079]

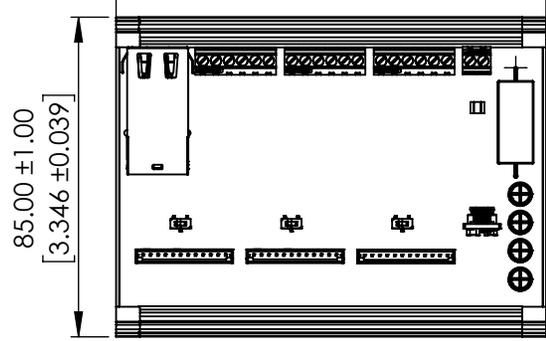

The MYO43 is a 3-motor CM1 TCP/IP programming interface and provides access to Inputs 2, 3 and 4 as well as output 2 for each motor. Provides 24V sinking/sourcing inputs and sinking output. A switch allows you to switch IN4 from a digital input to 0-10V analog input. Power split to all three motors from a single 2-wire terminal.



Unless otherwise specified, tolerance to be: CNS 4018 IT 14 Linear measures		NAME	DATE	DO NOT SCALE DRAWING	UNITS: mm [inch]
0.5-3	±0.1	DRAWN	M.Dank	Feb 1 '24	TITLE: MYO43 3 motor TCP/IP programming interface
3-6	±0.1	CHECKED	x	x	
6-30	±0.2	ENG APPR.	x	x	
30-120	±0.3	 Myostat Motion Control Inc. +1 905-836-4441 www.myostat.ca		SIZE	PRT. NO.
120-315	±0.5			A	MYO43-01A
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MYOSTAT MOTION CONTROL INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MYOSTAT MOTION CONTROL INC. IS PROHIBITED.				SHEET 1 OF 1	